

Q.TRON XL-G2 SERIES



610-630 Wp | 156 Cells
22.6% Maximum Module Efficiency

MODEL Q.TRON XL-G2.7/BFG



Q.ANTUM
NEO

High performance Qcells N-type solar cells

Q.ANTUM NEO Technology with optimized module layout boosts module efficiency up to 22.6%.



Bifacial energy yield gain of up to 21%

Bifacial Q.ANTUM NEO solar cells make efficient use of light shining on the module rear-side for radically improved LCOE.



A reliable investment

Double glass module design enables extended lifetime with 12-year product warranty and improved 30-year performance warranty¹.



Enduring high performance

Long-term yield security with Anti LeTID and Anti PID Technology², Hot-Spot Protect.



Frame for versatile mounting options

High-tech aluminum alloy frame protects from damage, enables use of a wide range of mounting structures and is certified regarding IEC for high snow (5400 Pa) and wind loads (2400 Pa).



Innovative all-weather technology

Optimal yields, whatever the weather with excellent low-light and temperature behavior.

¹ See data sheet on rear for further information.

² APT test conditions according to IEC/TS 62804-1:2015 method B (-1500 V, 168h) including post treatment according to IEC 61215-1-1 Ed. 2.0 (CD)

The ideal solution for:




Ground mounted solar panels



Q.TRON XL-G2 SERIES

Mechanical Specification

Format	2462 mm × 1134 mm × 30 mm (including frame)
Weight	34.8 kg
Front Cover	2 mm thermally pre-stressed glass with anti-reflection technology
Back Cover	2 mm semi-tempered glass
Frame	Anodised aluminium
Cell	6 × 26 monocrystalline Q.ANTUM NEO solar half cells
Junction box	53-101 mm × 32-60 mm × 15-18 mm Protection class IP67, with bypass diodes
Cable	4 mm ² Solar cable; (+) ≥750 mm, (-) ≥350 mm
Connector	Stäubli MC4-Evo2, Hanwha Q CELLS HQC4; IP68

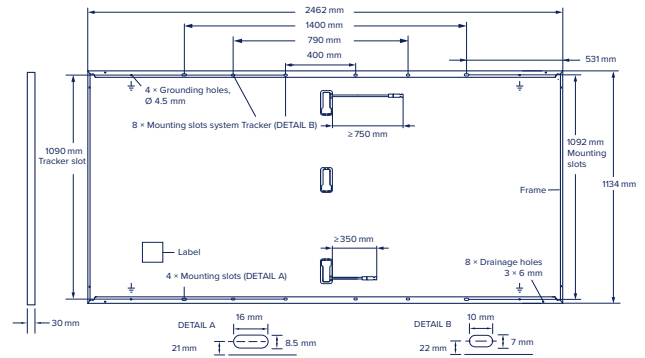

Electrical Characteristics

POWER CLASS		610	615	620	625	630	
MINIMUM PERFORMANCE AT STANDARD TEST CONDITIONS, STC ¹ (POWER TOLERANCE +5W/-0W)							
Minimum	Power at MPP ¹	P_{MPP} [W]	610	615	620	625	630
	Short Circuit Current ¹	I_{SC} [A]	13.65	13.71	13.76	13.82	13.88
	Open Circuit Voltage ¹	V_{OC} [V]	56.11	56.39	56.67	56.95	57.23
	Current at MPP	I_{MPP} [A]	12.95	13.00	13.05	13.10	13.15
	Voltage at MPP	V_{MPP} [V]	47.10	47.30	47.50	47.70	47.89
	Efficiency ¹	η [%]	≥21.8	≥22.0	≥22.2	≥22.4	≥22.6

Bifaciality of P_{MPP} and I_{SC} 80% ± 5% • Bifaciality given for rear side irradiation on top of STC (front side) • According to IEC 60904-1-2


¹Measurement tolerances P_{MPP} ±3%; I_{SC} , V_{OC} ±5% at STC; 1000 W/m²; *at BSTC: 1000 W/m² + φ × 135 W/m², φ = 80%, 25 ± 2 °C, AM 1.5 according to IEC 60904-3

MINIMUM PERFORMANCE AT NORMAL OPERATING CONDITIONS, NMOT^{2w}

Minimum	Power at MPP	P_{MPP} [W]	461.1	464.9	468.7	472.5	476.2
	Short Circuit Current	I_{SC} [A]	11.00	11.05	11.09	11.14	11.18
	Open Circuit Voltage	V_{OC} [V]	53.24	53.51	53.77	54.04	54.31
	Current at MPP	I_{MPP} [A]	10.18	10.22	10.26	10.30	10.34
	Voltage at MPP	V_{MPP} [V]	45.28	45.48	45.67	45.86	46.05

²800 W/m², NMOT, spectrum AM 1.5

Qcells PERFORMANCE WARRANTY

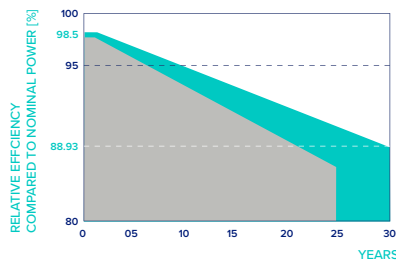


At least 98.5% of nominal power during first year. Thereafter max. 0.33% degradation per year. At least 95.53% of nominal power up to 10 years. At least 88.93% of nominal power up to 30 years.

All data within measurement tolerances. Full warranties in accordance with the warranty terms of the Qcells sales organisation of your respective country.

*Standard terms of guarantee for the 5 PV companies with the highest production capacity in 2021 (February 2021)

PERFORMANCE AT LOW IRRADIANCE

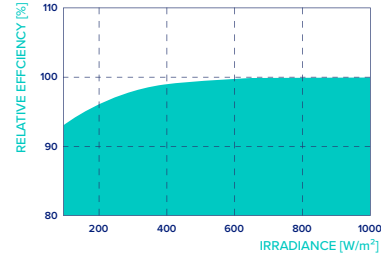

Typical module performance under low irradiance conditions in comparison to STC conditions (25 °C, 1000 W/m²).

TEMPERATURE COEFFICIENTS

Temperature Coefficient of I_{SC}	α [%/K]	+0.04	Temperature Coefficient of V_{OC}	β [%/K]	-0.24
Temperature Coefficient of P_{MPP}	γ [%/K]	-0.30	Nominal Module Operating Temperature	NMOT [°C]	43 ± 3

Properties for System Design

Maximum System Voltage	V_{SYS} [V]	1500	PV module classification	Class II
Maximum Reverse Current	I_R [A]	25	Fire Rating based on ANSI/UL 61730	C / TYPE 29
Max. Design Load, Push/Pull	[Pa]	3600/1600	Permitted Module Temperature on Continuous Duty	-40 °C - +85 °C
Max. Test Load, Push/Pull	[Pa]	5400/2400		

Qualifications and Certificates

Quality Controlled PV - TÜV Rheinland; IEC 61215:2016; IEC 61730:2016. This data sheet complies with DIN EN 50380.



Qcells pursues minimizing paper output in consideration of the global environment.

Note: Installation instructions must be followed. Contact our technical service for further information on approved installation of this product.

Hanwha Q CELLS GmbH Sonnenallee 17-21, 06766 Bitterfeld-Wolfen, Germany | TEL +49 (0)3494 66 99-23444 | FAX +49 (0)3494 66 99-23000 | EMAIL sales@q-cells.com | WEB www.qcells.com

qcells